



Price List Refrigeration 04/2022

Cooling

Cooler up to 16 bar - air-cooled - HAO series

Scope of supply


Ready-to-use cooler; transport packing is not included in the scope of supply and is charged separately. Operating manuals including the manufacturer's declaration and/or declaration of conformity are available in electronic format on our web site: → www.fstweb.de → „Download“ → „Operating Manuals“
Operating manuals are available in English and German language.


Standard version

Air-cooled cooler with water separator without condensate drain

	Nominal volume flow*1	Maximum operating pressure	Connection compressed air	Connection condensate discharge	Supply voltage	Demand of cooling air	Price	Prod.-grp.
HAO-RA 10 WS	60 m ³ /h	16 bar	G 1	R 3/8	230 V	800 m ³ /h	722 €	42
HAO-RA 20 WS	120 m ³ /h	16 bar	G 1	R 3/8	230 V	800 m ³ /h	1.001 €	42
HAO-RA 30 WS	180 m ³ /h	16 bar	G 1 ½	R 3/8	400 V	2.980 m ³ /h	1.073 €	42
HAO-RA 40 WS	240 m ³ /h	16 bar	G 1 ½	R 3/8	400 V	3.790 m ³ /h	1.179 €	42
HAO-RA 65 WS	390 m ³ /h	16 bar	G 2 - G 1 ½	R 3/8	400 V	6.500 m ³ /h	1.615 €	42
HAO-RA 80 WS	480 m ³ /h	16 bar	G 2 - G 1 ½	R 3/8	400 V	6.500 m ³ /h	1.702 €	42
HAO-RA 120 WS	720 m ³ /h	16 bar	G 2	R 3/8	400 V	8.200 m ³ /h	2.828 €	42
HAO-RA 160 WS	960 m ³ /h	16 bar	G 2 ½	R 3/8	400 V	8.200 m ³ /h	3.317 €	42
HAO-RA 200 WS	1.200 m ³ /h	16 bar	G 3 - G 2 ½	R 3/8	400 V	12.000 m ³ /h	4.064 €	42
HAO-RA 250 WS	1.500 m ³ /h	16 bar	G 3	R 3/8	400 V	12.000 m ³ /h	4.774 €	42
HAO-RA 300 WS	1.800 m ³ /h	16 bar	DN 100	R 3/8	400 V	12.000 m ³ /h	6.246 €	42
HAO-RA 400 WS	2.400 m ³ /h	16 bar	DN 100	R 3/8	400 V	16.400 m ³ /h	7.812 €	42
HAO-RA 500 WS	3.000 m ³ /h	12 bar	DN 125	R 1	400 V	26.000 m ³ /h	9.331 €	42
HAO-RA 650 WS	3.900 m ³ /h	12 bar	DN 125	R 1	400 V	26.000 m ³ /h	11.390 €	42
HAO-RA 750 WS	4.500 m ³ /h	12 bar	DN 150	R 2	400 V	26.000 m ³ /h	12.752 €	42

*1- refers to 1 bar(a) and 20°C at 7 bar operating pressure, 25°C ambient temperature


 Coolers with pneumatically driven fan are available on request.

 **Sizing for your individual operating conditions**
Please contact the technical support of FST.

Cooling

Cooler up to 16 bar - air-cooled - HAO series

Options, order examples and price calculations

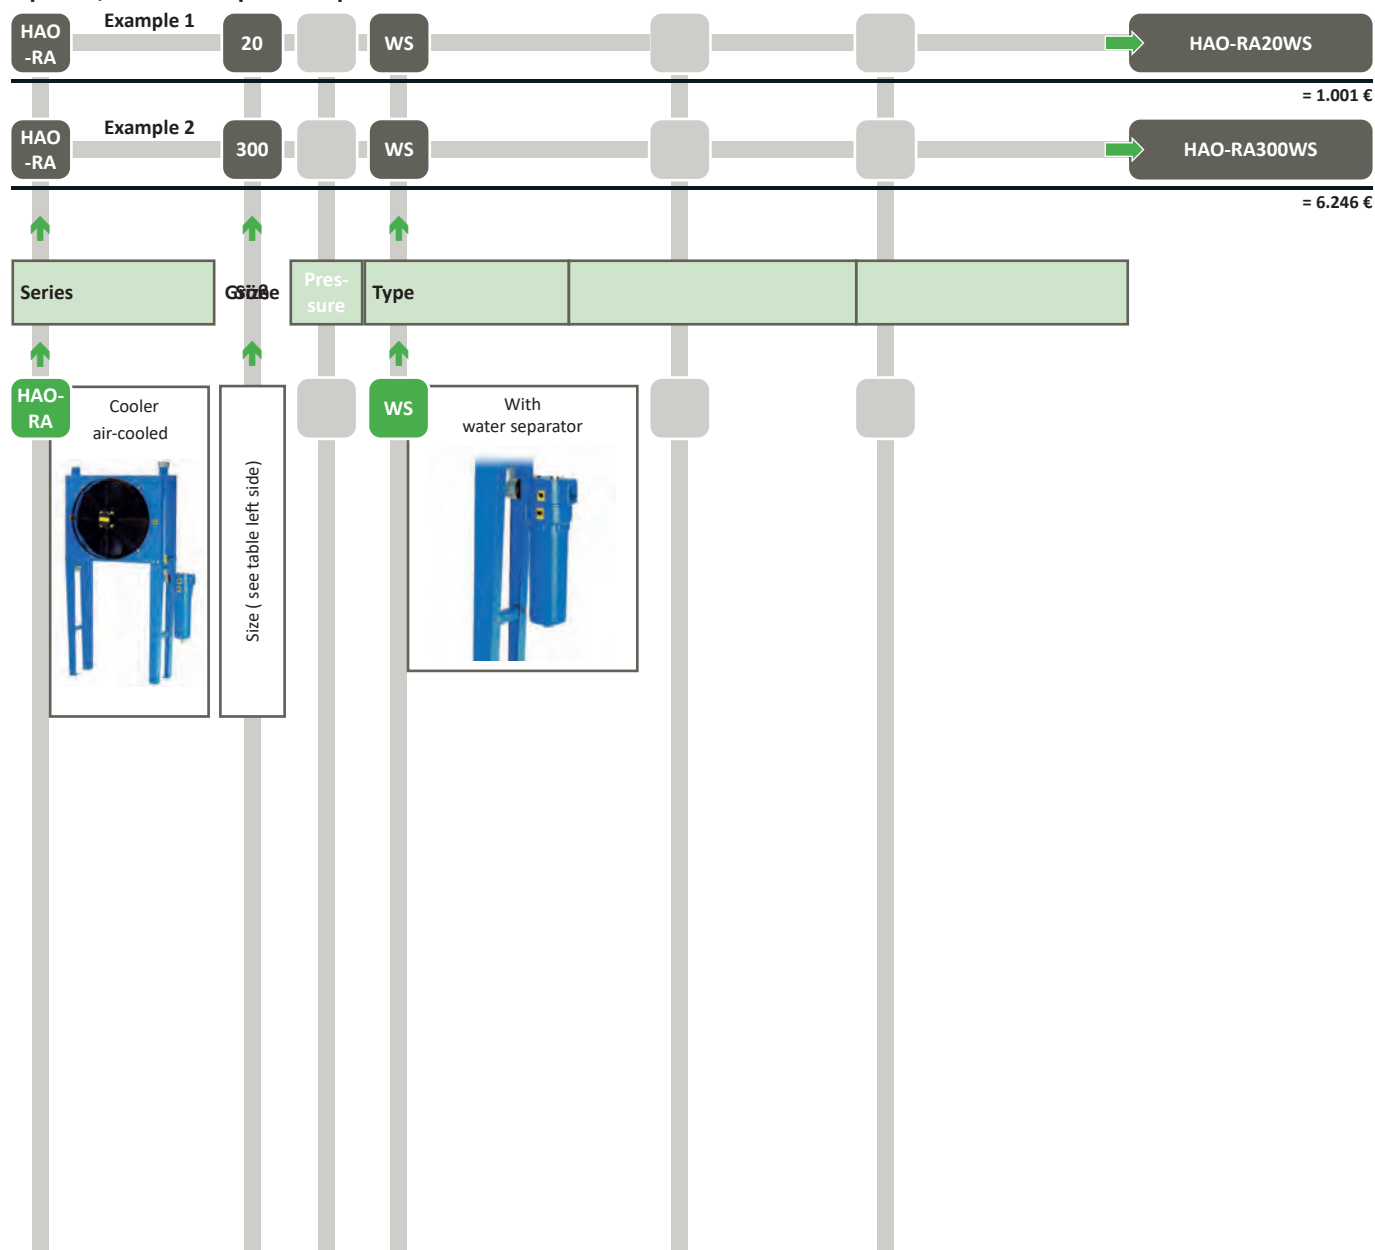

Sizes and weights (including water separator)

	Height [A]	Width [B]	Depth [C]	Weight
HAO-RA 10 WS	955 mm	600 mm	270 mm	19 kg
HAO-RA 20 WS	955 mm	600 mm	270 mm	20 kg
HAO-RA 30 WS	1145 mm	820 mm	270 mm	29 kg
HAO-RA 40 WS	1145 mm	1030 mm	330 mm	32 kg
HAO-RA 65 WS	1145 mm	1030 mm	360 mm	51 kg
HAO-RA 80 WS	1390 mm	1030 mm	380 mm	53 kg
HAO-RA 120 WS	1555 mm	1030 mm	655 mm	97 kg
HAO-RA 160 WS	2110 mm	1230 mm	655 mm	120 kg
HAO-RA 200 WS	2120 mm	1410 mm	490 mm	240 kg
HAO-RA 250 WS	2120 mm	1410 mm	490 mm	250 kg
HAO-RA 300 WS	2060 mm	1970 mm	490 mm	280 kg
HAO-RA 400 WS	2060 mm	2290 mm	490 mm	300 kg
HAO-RA 500 WS	2000 mm	3245 mm	560 mm	310 kg
HAO-RA 650 WS	2000 mm	3245 mm	560 mm	360 kg
HAO-RA 750 WS	2020 mm	3325 mm	565 mm	390 kg

Cooling

Cooler up to 16 bar - water-cooled - HWO series



Scope of supply

Ready-to-use cooler; transport packing is not included in the scope of supply and is charged separately. Operating manuals including the manufacturer's declaration and/or declaration of conformity are available in electronic format on our web site: → www.fstweb.de → „Download“ → „Operating Manuals“
Operating manuals are available in English and German language.

Standard version

Water-cooled cooler with fixed bundle; option for downstream water separator without condensate drain

	Nominal volume flow*1	Maximum operating pressure	Connection compressed air	Connection cooling water	Connection condensate discharge	Price	Prod.-grp.
HWO-A 30	180 m ³ /h	16 bar	G 1 ½	G 1/2	---	1.237 €	42
HWO-A 60	360 m ³ /h	12 bar	G 2 ½	G 3/4	---	1.536 €	42
HWO-A 80	480 m ³ /h	12 bar	G 2 ½	G 3/4	---	1.708 €	42
HWO-A 140	840 m ³ /h	12 bar	DN 100	G 1	---	3.341 €	42
HWO-A 250	1.500 m ³ /h	12 bar	DN 100	G 1	---	3.624 €	42
HWO-A 400	2.400 m ³ /h	12 bar	DN 150	G 1 ¼	---	6.054 €	42
HWO-A 500	3.000 m ³ /h	12 bar	DN 175	G 1 ¼	---	6.402 €	42
HWO-A 800	4.800 m ³ /h	12 bar	DN 250	G 1 ¼	---	8.236 €	42
HWO-A 1100	6.600 m ³ /h	12 bar	DN 250	G 1 ½	---	16.190 €	42
HWO-A 1500	9.000 m ³ /h	12 bar	DN 300	G 2	---	20.478 €	42
HWO-A 1800	10.800 m ³ /h	12 bar	DN 350	G 2	---	21.523 €	42
HWO-A 2100	12.600 m ³ /h	12 bar	DN 400	G 2 ½	---	23.935 €	42
<hr/>							
HWO-A 30 WS	180 m ³ /h	16 bar	G 1 ½	G 1/2	R 3/8	1.621 €	42
HWO-A 60 WS	360 m ³ /h	12 bar	G 2 ½ - G 1 ½	G 3/4	R 3/8	2.019 €	42
HWO-A 80 WS	480 m ³ /h	12 bar	G 2 ½ - G 1 ½	G 3/4	R 3/8	2.248 €	42
HWO-A 140 WS	840 m ³ /h	12 bar	DN 100	G 1	R 3/8	4.335 €	42
HWO-A 250 WS	1.500 m ³ /h	12 bar	DN 100	G 1	R 3/8	4.889 €	42
HWO-A 400 WS	2.400 m ³ /h	12 bar	DN 150 - DN 125	G 1 ¼	R 3/8	8.028 €	42
HWO-A 500 WS	3.000 m ³ /h	12 bar	DN 175 - DN 125	G 1 ¼	R 1	8.534 €	42
HWO-A 800 WS	4.800 m ³ /h	12 bar	DN 250 - DN 150	G 1 ¼	R 2	10.960 €	42
HWO-A 1100 WS	6.600 m ³ /h	12 bar	DN 250 - DN 150	G 1 ½	R 2	21.859 €	42
HWO-A 1500 WS	9.000 m ³ /h	12 bar	DN 300 - DN 200	G 2	R 2	25.190 €	42
HWO-A 1800 WS	10.800 m ³ /h	12 bar	DN 350 - DN 200	G 2	R 2	26.278 €	42
HWO-A 2100 WS	12.600 m ³ /h	12 bar	DN 400 - DN 200	G 2 ½	R 2	29.831 €	42

*1- refers to 1 bar(a) and 20°C at 7 bar operating pressure



Water-cooled coolers for higher volume flows, bigger connection sizes or stainless-steel materials are available on request.




Sizing for your individual operating conditions

Please contact the technical support of FST.

Cooling

Cooler up to 16 bar - water-cooled - HWO series

Options, order examples and price calculations

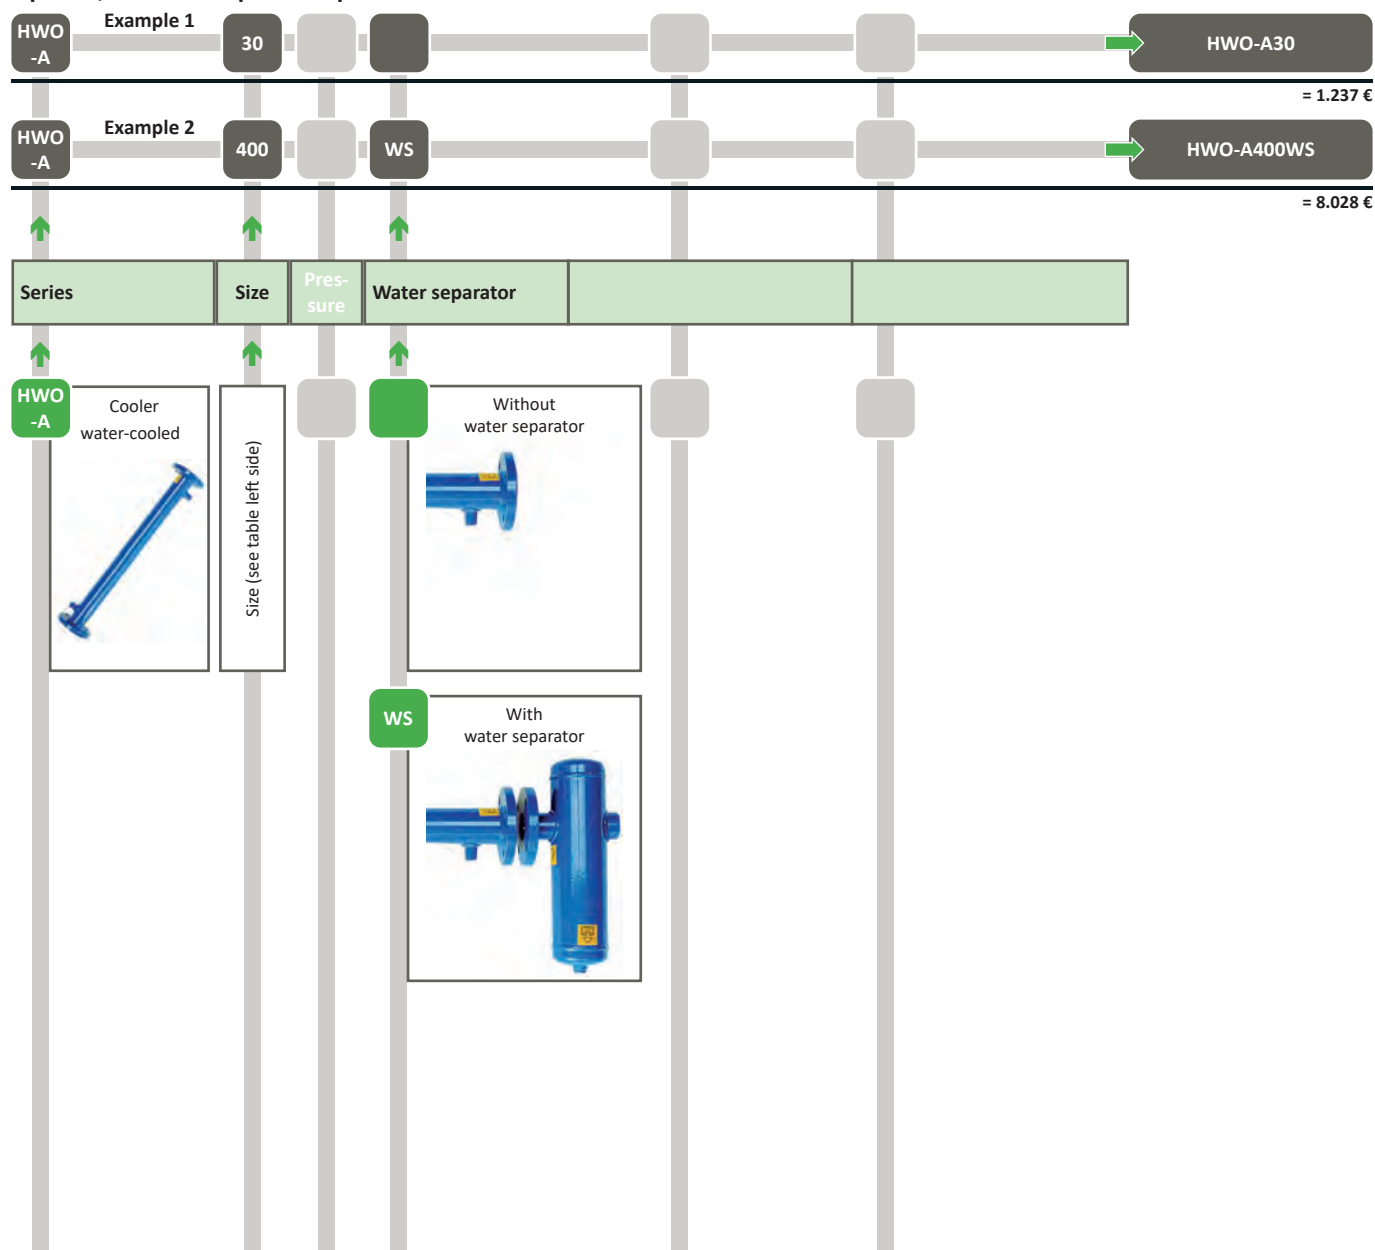

Sizes and weights

	Height [A]	Width [B]	Depth [C]	Weight		Height [A]	Width [B]	Depth [C]	Weight
HWO-A 30	165 mm	970 mm	165 mm	17 kg	HWO-A 30 WS	385 mm	1110 mm	165 mm	18 kg
HWO-A 60	185 mm	1210 mm	185 mm	24 kg	HWO-A 60 WS	675 mm	1405 mm	185 mm	29 kg
HWO-A 80	185 mm	1450 mm	185 mm	33 kg	HWO-A 80 WS	675 mm	1645 mm	185 mm	38 kg
HWO-A 140	220 mm	1300 mm	220 mm	43 kg	HWO-A 140 WS	757 mm	1845 mm	220 mm	49 kg
HWO-A 250	220 mm	1300 mm	220 mm	109 kg	HWO-A 250 WS	757 mm	1845 mm	220 mm	115 kg
HWO-A 400	285 mm	1300 mm	285 mm	153 kg	HWO-A 400 WS	772 mm	2068 mm	285 mm	160 kg
HWO-A 500	315 mm	1300 mm	315 mm	156 kg	HWO-A 500 WS	790 mm	1907 mm	315 mm	210 kg
HWO-A 800	405 mm	1300 mm	405 mm	250 kg	HWO-A 800 WS	845 mm	2023 mm	405 mm	330 kg
HWO-A 1100	405 mm	1300 mm	405 mm	280 kg	HWO-A 1100 WS	845 mm	2023 mm	405 mm	360 kg
HWO-A 1500	460 mm	1300 mm	460 mm	304 kg	HWO-A 1500 WS	1025 mm	2182 mm	460 mm	460 kg
HWO-A 1800	520 mm	1300 mm	520 mm	334 kg	HWO-A 1800 WS	1025 mm	2307 mm	520 mm	460 kg
HWO-A 2100	580 mm	1500 mm	580 mm	374 kg	HWO-A 2100 WS	1025 mm	2567 mm	580 mm	530 kg

Drying

Refrigeration dryer up to 16 bar- DFX.. series



Scope of supply

Ready-to-use refrigeration dryer with hot-gas by-pass, incl. zero-loss condensate drain, and potential-free contact; transport packing is not included in the scope of supply and is charged separately. Operating manuals including the manufacturer's declaration and/or declaration of conformity are available in electronic format on our web site: → www.fstweb.de → „Download“ → „Operating Manuals“
Operating manuals are available in English and German language.

Standard version

Refrigeration dryer with electronic condensate drain and alarm contact; with hot gas bypass control; DFX 2-15 suitable for wall mounting


	Nominal volume flow*1	Maximum operating pressure	Connection	Supply voltage	Price	Prod.-grp.
DFX 2	20 m ³ /h	16 bar	G 3/8	230 V	1.258 €	41
DFX 4	35 m ³ /h	16 bar	G 1/2	230 V	1.406 €	41
DFX 5	50 m ³ /h	16 bar	G 1/2	230 V	1.480 €	41
DFX 7	65 m ³ /h	16 bar	G 1/2	230 V	1.569 €	41
DFX 9	85 m ³ /h	16 bar	G 1/2	230 V	1.629 €	41
DFX 11	105 m ³ /h	16 bar	G 1/2	230 V	1.982 €	41
DFX 13	125 m ³ /h	14 bar	G 1	230 V	2.117 €	41
DFX 15	150 m ³ /h	14 bar	G 1	230 V	2.227 €	41
DFX 18	180 m ³ /h	14 bar	G 1 ¼	230 V	2.548 €	41
DFX 23	225 m ³ /h	14 bar	G 1 ¼	230 V	3.007 €	41
DFX 30	300 m ³ /h	14 bar	G 1 ½	230 V	3.478 €	41
DFX 36	360 m ³ /h	14 bar	G 1 ½	230 V	4.147 €	41
DFX 45	450 m ³ /h	14 bar	G 1 ½	230 V	5.362 €	41
DFX 55	550 m ³ /h	14 bar	G 2	230 V	6.210 €	41
DFX 65	650 m ³ /h	14 bar	G 2	230 V	7.243 €	41
DFX 75	750 m ³ /h	14 bar	G 2	230 V	8.190 €	41
DFX 85	850 m ³ /h	14 bar	G 2	230 V	8.716 €	41

*1 - refers to 1 bar(a) and 20°C at 7 bar operating pressure, 35°C inlet temperature, 25°C ambient temperature

Drying

Refrigeration dryer up to 16 bar- DFX.. series

Options, order examples and price calculations

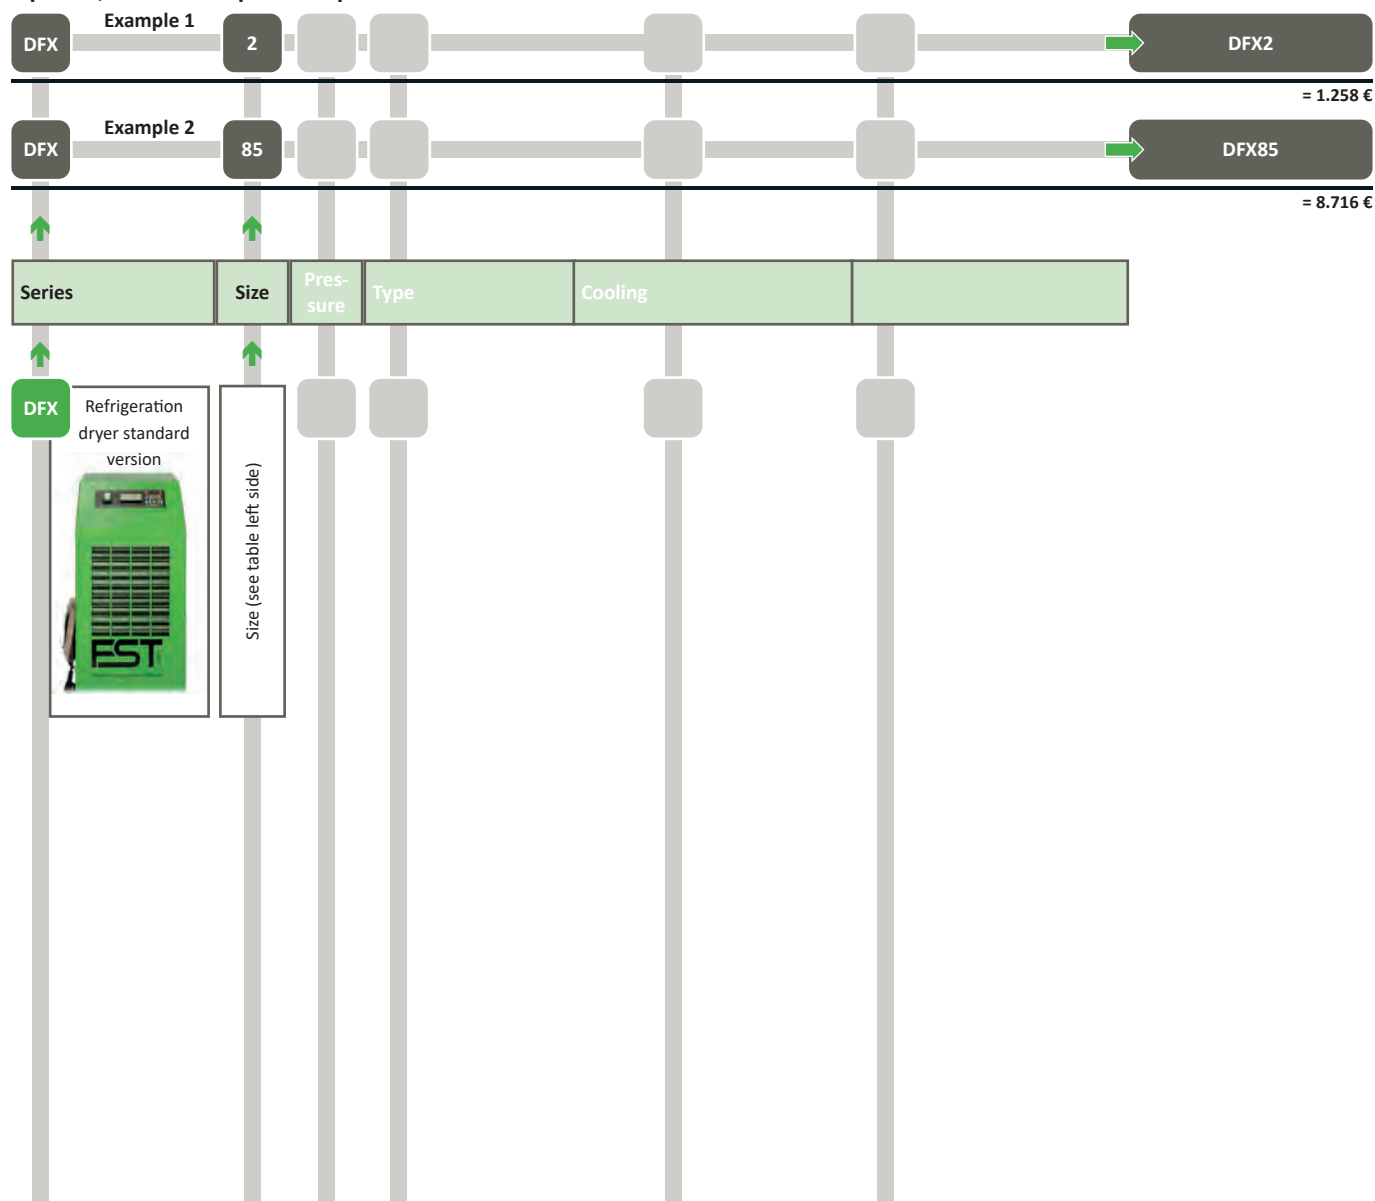

Sizes and weight

	Height [A]	Width [B]	Depth [C]	Weight
DFX 2	645 mm	360 mm	410 mm	24 kg
DFX 4	645 mm	360 mm	410 mm	26 kg
DFX 5	645 mm	360 mm	410 mm	27 kg
DFX 7	645 mm	360 mm	410 mm	29 kg
DFX 9	645 mm	360 mm	410 mm	31 kg
DFX 11	645 mm	360 mm	410 mm	31 kg
DFX 13	645 mm	360 mm	410 mm	33 kg
DFX 15	645 mm	360 mm	410 mm	33 kg
DFX 18	870 mm	480 mm	660 mm	55 kg
DFX 23	870 mm	480 mm	660 mm	56 kg
DFX 30	870 mm	480 mm	660 mm	57 kg
DFX 36	870 mm	480 mm	660 mm	61 kg
DFX 45	870 mm	480 mm	660 mm	68 kg
DFX 55	1055 mm	645 mm	920 mm	116 kg
DFX 65	1055 mm	645 mm	920 mm	118 kg
DFX 75	1055 mm	645 mm	920 mm	121 kg
DFX 85	1055 mm	645 mm	920 mm	155 kg

Drying

Refrigeration dryer up to 16 bar- DFLO series



Scope of supply

Ready-to-use refrigeration dryer; transport packing is not included in the scope of supply and is charged separately.

Operating manuals including the manufacturer's declaration and/or declaration of conformity are available in electronic format on our web site: → www.fstweb.de → „Download“ → „Operating Manuals“

Operating manuals are available in English and German language.

Standard version

Refrigeration dryer with electronic condensate drain and alarm contact; option for water-cooled (W)

		Nominal volume flow*1	Maximum operating pressure	Connection	Price		Price	Prod.-grp.
DFLO 2.4		24 m ³ /h	16 bar	G 3/8	1.341 €			41
DFLO 5.4		54 m ³ /h	16 bar	G 1/2	1.436 €			41
DFLO 7.2		72 m ³ /h	16 bar	G 1/2	1.689 €			41
DFLO 10.8		108 m ³ /h	16 bar	G 3/4	1.873 €			41
DFLO 14.4		144 m ³ /h	16 bar	G 3/4	2.033 €			41
DFLO 18		180 m ³ /h	16 bar	G 3/4	2.468 €			41
DFLO 22.5		225 m ³ /h	16 bar	G 1	3.016 €			41
DFLO 26		260 m ³ /h	16 bar	G 1	3.261 €			41
DFLO 36		360 m ³ /h	16 bar	G 1 1/2	4.265 €			41
DFLO 48		480 m ³ /h	16 bar	G 1 1/2	5.529 €			41
DFLO 66		660 m ³ /h	16 bar	G 2	6.746 €	DFLO 66 W	8.654 €	41
DFLO 78		780 m ³ /h	16 bar	G 2	7.971 €	DFLO 78 W	10.013 €	41
DFLO 100		1.000 m ³ /h	13 bar	G 2	9.502 €	DFLO 100 W	11.035 €	41
DFLO 150		1.500 m ³ /h	14 bar	G 3	13.124 €	DFLO 150 W	13.722 €	41
DFLO 180		1.800 m ³ /h	14 bar	G 3	14.532 €	DFLO 180 W	14.841 €	41
DFLO 225		2.250 m ³ /h	14 bar	G 3	15.747 €	DFLO 225 W	16.081 €	41
DFLO 260		2.600 m ³ /h	14 bar	G 3	20.207 €	DFLO 260 W	20.207 €	41
DFLO 360		3.600 m ³ /h	13 bar	DN 125	24.563 €	DFLO 360 W	24.563 €	41
DFLO 420		4.200 m ³ /h	13 bar	DN 125	28.031 €	DFLO 420 W	28.031 €	41
DFLO 530		5.300 m ³ /h	13 bar	DN 150	31.495 €	DFLO 530 W	31.495 €	41
DFLO 600		6.000 m ³ /h	13 bar	DN 150	35.676 €	DFLO 600 W	35.676 €	41
DFLO 680		6.800 m ³ /h	13 bar	DN 150	39.520 €	DFLO 680 W	39.520 €	41
DFLO 880		8.800 m ³ /h	13 bar	DN 150	49.697 €	DFLO 880 W	49.697 €	41
DFLO 1000		10.000 m ³ /h	13 bar	DN 200	55.267 €	DFLO 1000 W	55.267 €	41
DFLO 1200		12.000 m ³ /h	13 bar	DN 200	60.838 €	DFLO 1200 W	60.838 €	41
DFLO 1360		13.600 m ³ /h	13 bar	DN 200	67.126 €	DFLO 1360 W	67.126 €	41
DFLO 1760		17.600 m ³ /h	13 bar	2 x DN 200	88.339 €	DFLO 1760 W	88.339 €	41
DFLO 2000		20.000 m ³ /h	13 bar	2 x DN 200	96.204 €	DFLO 2000 W	96.204 €	41
DFLO 2400		24.000 m ³ /h	13 bar	2 x DN 200	115.209 €	DFLO 2400 W	115.209 €	41

*1 - refers to 1 bar(a) and 20°C at 7 bar operating pressure, 35°C inlet temperature, 25°C Ambient temperature, +3°C pressure dew-point



Refrigeration dryers for higher volume flows, higher operating pressures or bigger connection sizes are available on request.



Sizing for your individual operating conditions


Please contact the technical support of FST.

For latest technical figures and information please refer to the relevant product data sheets, which are available in electronic format on our web site: → www.fstweb.de → „Download“ → „Product Data Sheets“

Drying

Refrigeration dryer up to 16 bar- DFLO series

Options, order examples and price calculations

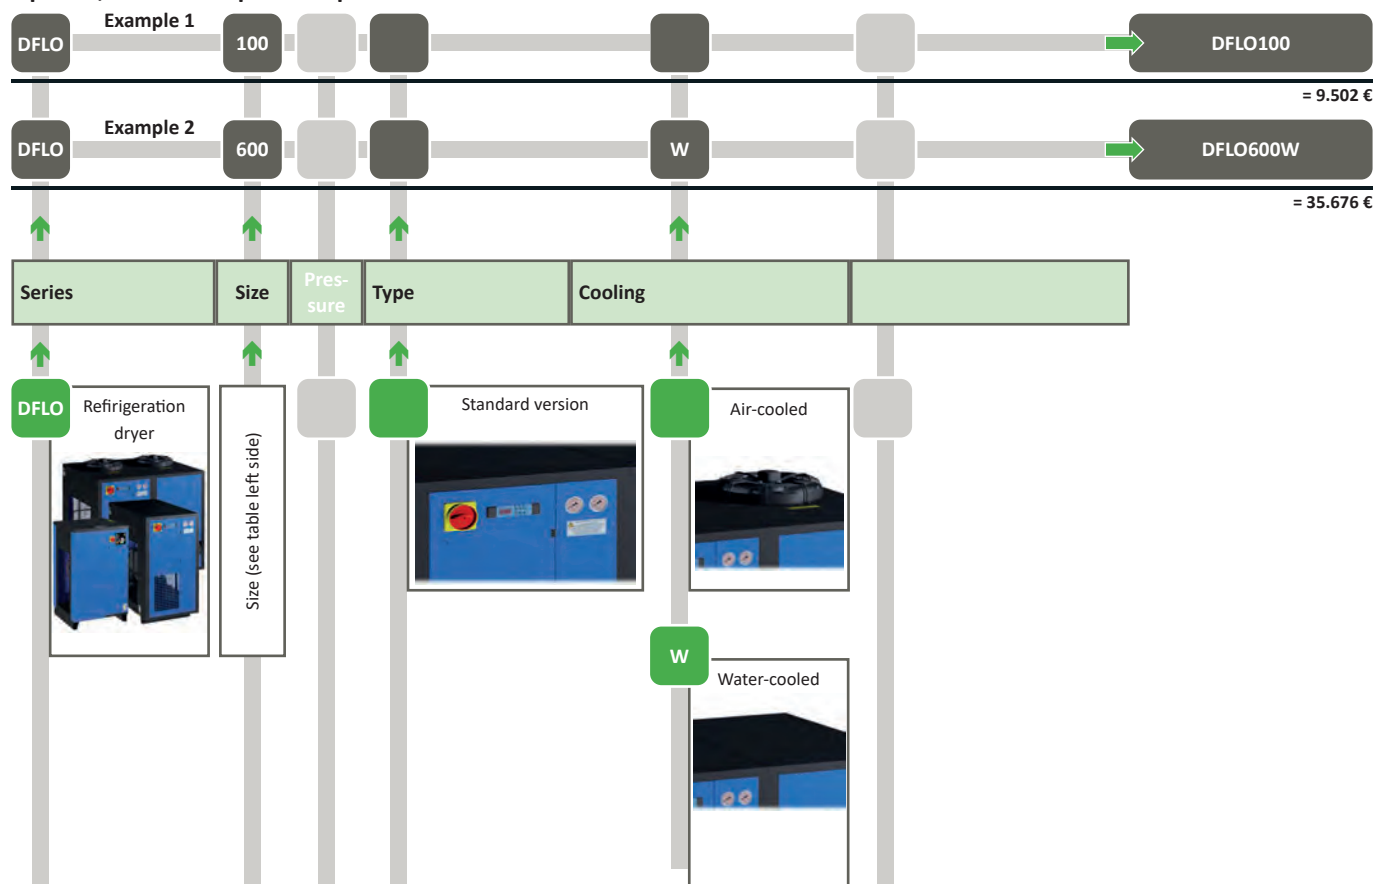

Sizes and weights

	Height [A]	Width [B]	Depth [C]	Weight		Height [A]	Width [B]	Depth [C]	Weight
DFLO 2.4	404 mm	305 mm	360 mm	18 kg					
DFLO 5.4	435 mm	370 mm	433 mm	26 kg					
DFLO 7.2	435 mm	370 mm	433 mm	26 kg					
DFLO 10.8	555 mm	420 mm	515 mm	33 kg					
DFLO 14.4	555 mm	420 mm	515 mm	34 kg					
DFLO 18	555 mm	420 mm	515 mm	43 kg					
DFLO 22.4	614 mm	485 mm	595 mm	62 kg					
DFLO 26	614 mm	485 mm	595 mm	64 kg					
DFLO 36	980 mm	500 mm	679 mm	87 kg					
DFLO 48	980 mm	500 mm	679 mm	110 kg					
DFLO 66	1360 mm	779 mm	720 mm	120 kg	DFLO 66 W	1360 mm	779 mm	720 mm	130 kg
DFLO 78	1360 mm	779 mm	720 mm	130 kg	DFLO 78 W	1360 mm	779 mm	720 mm	140 kg
DFLO 100	1360 mm	779 mm	720 mm	150 kg	DFLO 100 W	1360 mm	779 mm	720 mm	160 kg
DFLO 150	1539 mm	806 mm	1012 mm	234 kg	DFLO 150 W	1539 mm	806 mm	1012 mm	240 kg
DFLO 180	1539 mm	806 mm	1012 mm	234 kg	DFLO 180 W	1539 mm	806 mm	1012 mm	240 kg
DFLO 225	1539 mm	806 mm	1012 mm	260 kg	DFLO 225 W	1539 mm	806 mm	1012 mm	300 kg
DFLO 260	1555 mm	806 mm	1012 mm	260 kg	DFLO 260 W	1539 mm	806 mm	1012 mm	270 kg
DFLO 360	1555 mm	1510 mm	1500 mm	420 kg	DFLO 360 W	1555 mm	1510 mm	1500 mm	420 kg
DFLO 420	1555 mm	1510 mm	1500 mm	520 kg	DFLO 420 W	1555 mm	1510 mm	1500 mm	520 kg
DFLO 530	1555 mm	1510 mm	1500 mm	620 kg	DFLO 530 W	1555 mm	1510 mm	1500 mm	620 kg
DFLO 600	1555 mm	1510 mm	1500 mm	720 kg	DFLO 600 W	1555 mm	1510 mm	1500 mm	720 kg
DFLO 680	1555 mm	1510 mm	1500 mm	735 kg	DFLO 680 W	1555 mm	1510 mm	1500 mm	745 kg
DFLO 880	1570 mm	2270 mm	1500 mm	1058 kg	DFLO 880 W	1570 mm	2270 mm	1500 mm	1095 kg
DFLO 1000	1570 mm	2270 mm	1590 mm	1128 kg	DFLO 1000 W	1570 mm	2270 mm	1590 mm	1165 kg
DFLO 1200	1565 mm	2270 mm	1590 mm	1205 kg	DFLO 1200 W	1565 mm	2270 mm	1590 mm	1245 kg
DFLO 1360	1565 mm	3025 mm	1590 mm	1360 kg	DFLO 1360 W	1565 mm	3025 mm	1590 mm	1380 kg
DFLO 1760	1570 mm	4535 mm	1500 mm	2116 kg	DFLO 1760 W	1570 mm	4535 mm	1500 mm	2190 kg
DFLO 2000	1570 mm	4535 mm	1590 mm	2256 kg	DFLO 2000 W	1570 mm	4535 mm	1590 mm	2330 kg
DFLO 2400	1565 mm	4535 mm	1590 mm	2720 kg	DFLO 2400 W	1565 mm	4535 mm	1590 mm	2490 kg

Drying

Refrigeration dryer up to 16 bar - DFLO..ES series



Scope of supply

Ready-to-use refrigeration dryer; transport packing is not included in the scope of supply and is charged separately.

Operating manuals including the manufacturer's declaration and/or declaration of conformity are available in electronic format on our web site: → www.fstweb.de → „Download“ → „Operating Manuals“

Operating manuals are available in English and German language.

Standard version

Refrigeration dryer with energy saving thermal mass circuit (ES), electronic condensate drain and alarm contact; option for water-cooled version (W)

		Nominal volume flow*1	Maximum operating pressure	Connection	Price	Price	Prod.-grp.
DFLO	5.4 ES	54 m ³ /h	16 bar	G 1/2	2.239 €		43
DFLO	7.2 ES	72 m ³ /h	16 bar	G 1/2	2.489 €		43
DFLO	10.8 ES	108 m ³ /h	16 bar	G 3/4	2.746 €		43
DFLO	14.4 ES	144 m ³ /h	16 bar	G 3/4	2.873 €		43
DFLO	18 ES	180 m ³ /h	16 bar	G 1	3.467 €		43
DFLO	24 ES	240 m ³ /h	16 bar	G 1	4.207 €		43
DFLO	30 ES	300 m ³ /h	16 bar	G 1 ½	5.437 €		43
DFLO	36 ES	360 m ³ /h	16 bar	G 1 ½	5.576 €		43
DFLO	48 ES	480 m ³ /h	16 bar	G 1 ½	7.036 €		43
DFLO	66 ES	660 m ³ /h	16 bar	G 2	8.009 €		43
DFLO	78 ES	780 m ³ /h	13 bar	G 2	9.508 €		43
DFLO	100 ES	1.000 m ³ /h	14 bar	G 2	11.142 €		43
DFLO	150 ES	1.500 m ³ /h	14 bar	G 3	16.786 €	DFLO 150 ESW	18.475 € 43
DFLO	180 ES	1.800 m ³ /h	14 bar	G 3	18.090 €	DFLO 180 ESW	20.819 € 43
DFLO	225 ES	2.250 m ³ /h	14 bar	G 3	20.724 €	DFLO 225 ESW	22.776 € 43
DFLO	260 ES	2.600 m ³ /h	14 bar	G3	24.498 €	DFLO 260 ESW	24.498 € 43
DFLO	360 ES	3.600 m ³ /h	13 bar	DN 125	31.878 €	DFLO 360 ESW	31.878 € 43
DFLO	420 ES	4.200 m ³ /h	13 bar	DN 125	34.297 €	DFLO 420 ESW	34.297 € 43
DFLO	530 ES	5.300 m ³ /h	13 bar	DN 150	38.047 €	DFLO 530 ESW	38.047 € 43
DFLO	600 ES	6.000 m ³ /h	13 bar	DN 150	45.306 €	DFLO 600 ESW	45.306 € 43

*1 - refers to 1 bar(a) and 20°C at 7 bar operating pressure, 35°C inlet temperature, 25°C ambient temperature, +3°C pressure dew-point



Refrigeration dryers for higher volume flows, higher operating pressures or bigger connection sizes are available on request.




Sizing for your individual operating conditions

Please contact the technical support of FST.

Drying

Refrigeration dryer up to 16 bar - DFLO..ES series

Options, order examples and price calculations

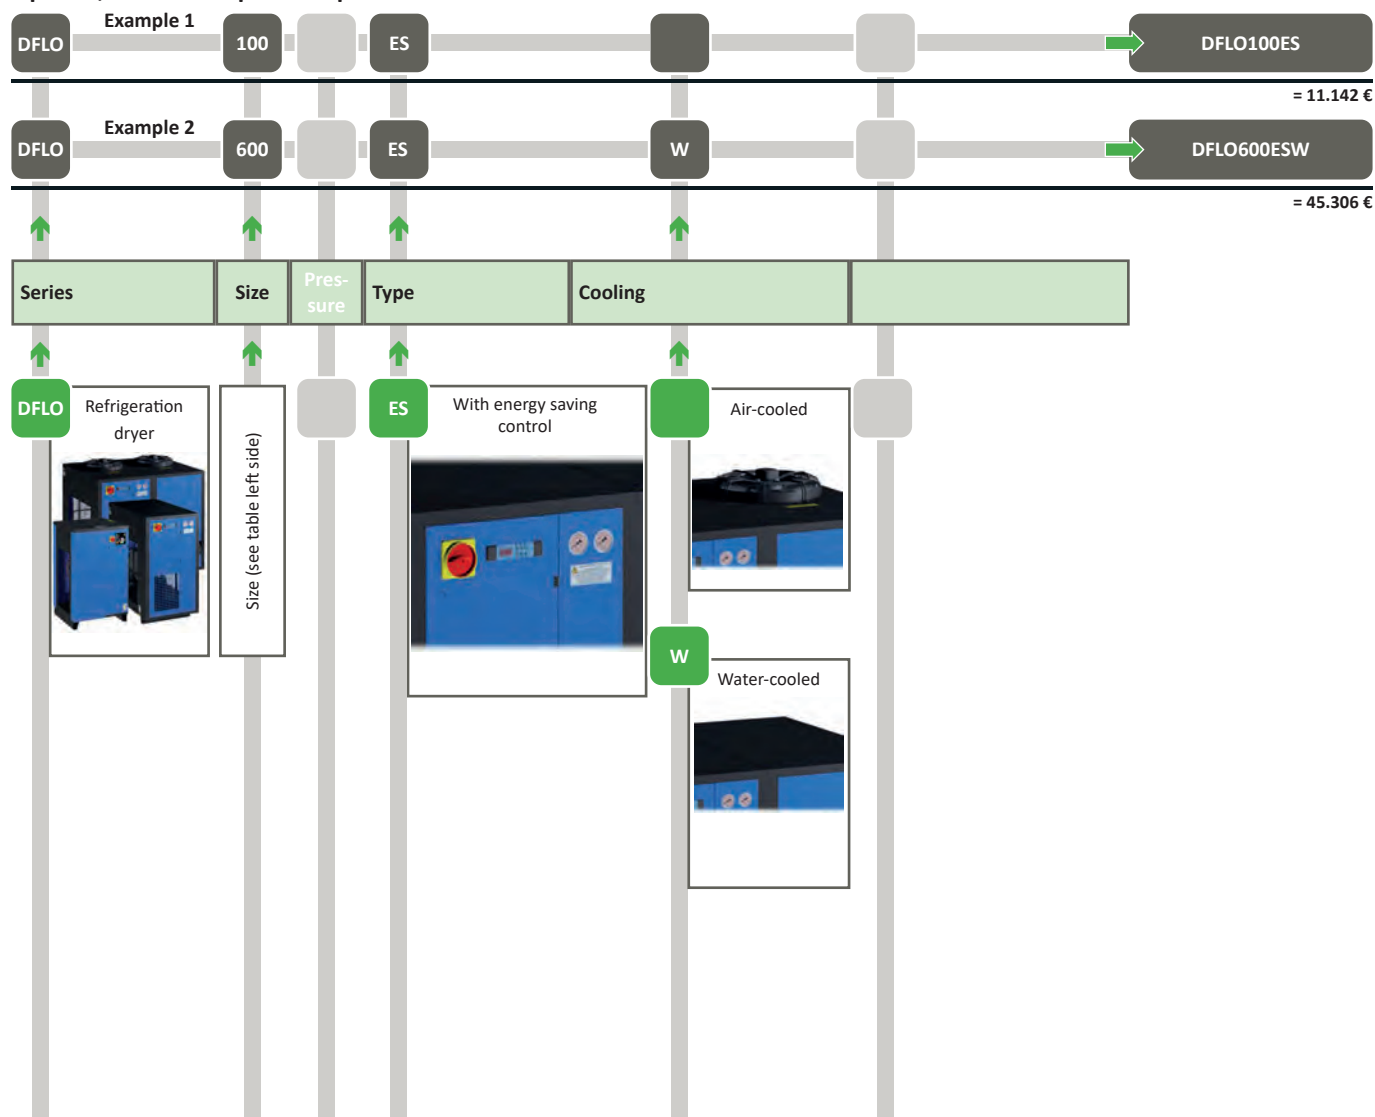

Sizes and weights

		Height [A]	Width [B]	Depth [C]	Weight		Height [A]	Width [B]	Depth [C]	Weight
DFLO 5.4 ES		651 mm	386 mm	500 mm	33 kg					
DFLO 7.2 ES		651 mm	386 mm	500 mm	35 kg					
DFLO 10.8 ES		651 mm	386 mm	500 mm	45 kg					
DFLO 14.4 ES		651 mm	386 mm	500 mm	50 kg					
DFLO 18 ES		771 mm	420 mm	567 mm	60 kg					
DFLO 24 ES		771 mm	420 mm	567 mm	70 kg					
DFLO 30 ES		980 mm	500 mm	720 mm	95 kg					
DFLO 36 ES		980 mm	500 mm	720 mm	100 kg					
DFLO 48 ES		980 mm	500 mm	720 mm	130 kg					
DFLO 66 ES		1340 mm	750 mm	780 mm	186 kg					
DFLO 78 ES		1340 mm	750 mm	780 mm	227 kg					
DFLO 100 ES		1340 mm	750 mm	780 mm	237 kg					
DFLO 150 ES		1539 mm	806 mm	1012 mm	244 kg	DFLO 150 ESW	1539 mm	806 mm	1012 mm	270 kg
DFLO 180 ES		1539 mm	806 mm	1012 mm	244 kg	DFLO 180 ESW	1539 mm	806 mm	1012 mm	270 kg
DFLO 225 ES		1539 mm	806 mm	1012 mm	270 kg	DFLO 225 ESW	1539 mm	806 mm	1012 mm	300 kg
DFLO 260 ES		1539 mm	806 mm	1012 mm	399 kg	DFLO 260 ESW	1539 mm	806 mm	1012 mm	410 kg
DFLO 360 ES		1570 mm	1510 mm	1500 mm	420 kg	DFLO 360 ESW	1570 mm	1510 mm	1500 mm	420 kg
DFLO 420 ES		1570 mm	1510 mm	1500 mm	520 kg	DFLO 420 ESW	1570 mm	1510 mm	1500 mm	520 kg
DFLO 530 ES		1570 mm	1510 mm	1500 mm	620 kg	DFLO 530 ESW	1570 mm	1510 mm	1500 mm	620 kg
DFLO 600 ES		1570 mm	1510 mm	1500 mm	720 kg	DFLO 600 ESW	1570 mm	1510 mm	1500 mm	720 kg

FST GmbH

Weierdamm 17 • 57250 Netphen-Deuz • Germany

Sales • Engineering • Service:

Im Teelbruch 106 • 45219 Essen

Tel.: +49 (0) 2054 8735-0

info@fstweb.de • www.fstweb.de

